
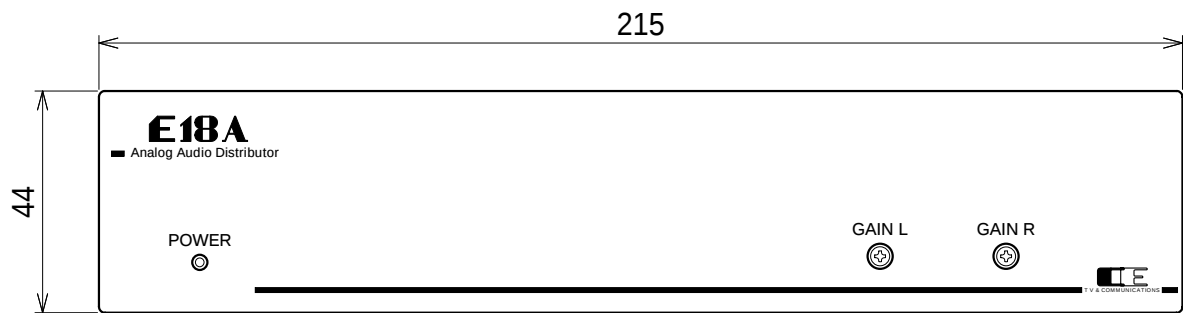
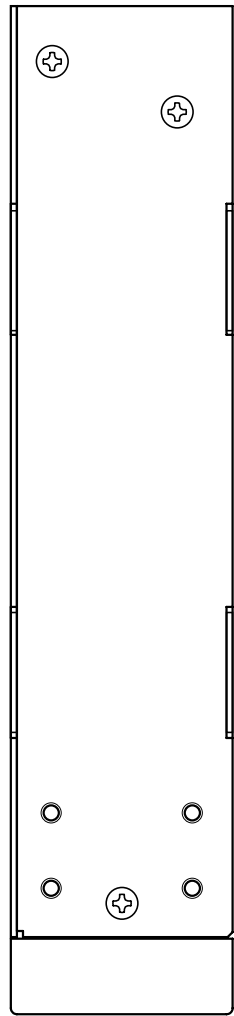
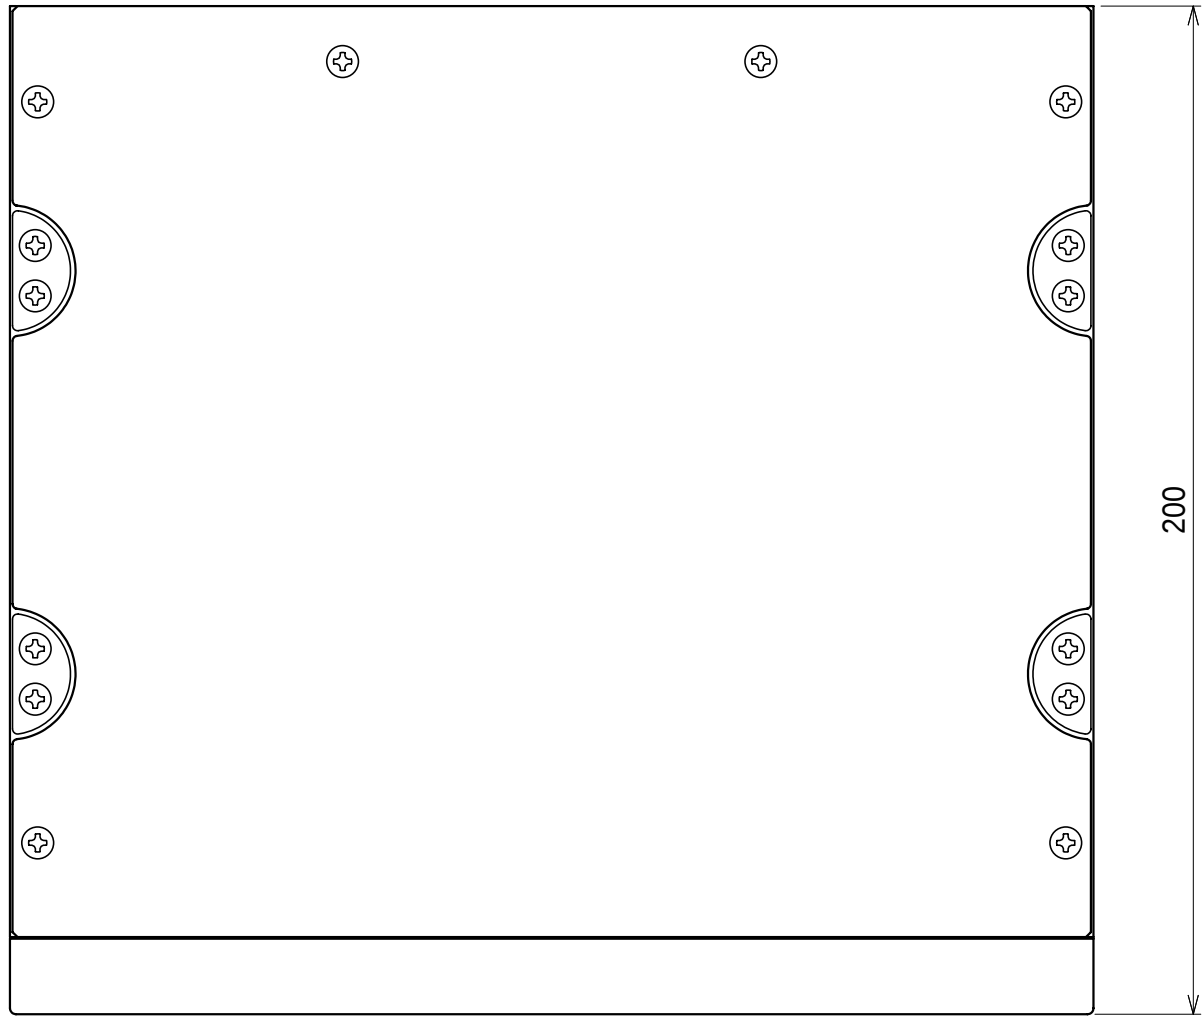


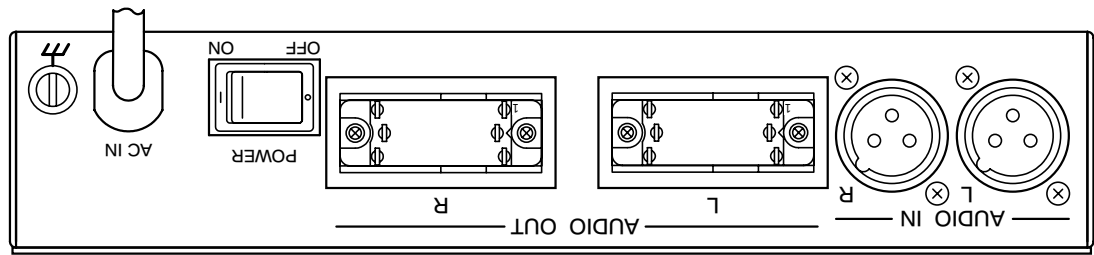

寸法値に突起部は含まれません

TOLERANCE			UNIT	mm	ANGLE	3rd	△ ×																		
<table><tr><td>L</td><td>4</td><td>± 0.1</td></tr><tr><td>4 < L</td><td>16</td><td>± 0.2</td></tr><tr><td>16 < L</td><td>63</td><td>± 0.3</td></tr><tr><td>63 < L</td><td>250</td><td>± 0.4</td></tr><tr><td>250 < L</td><td></td><td>± 0.6</td></tr></table>			L	4	± 0.1	4 < L	16	± 0.2	16 < L	63	± 0.3	63 < L	250	± 0.4	250 < L		± 0.6	ISSUED		SCALE		△ ×			
L	4	± 0.1																							
4 < L	16	± 0.2																							
16 < L	63	± 0.3																							
63 < L	250	± 0.4																							
250 < L		± 0.6																							
2003.06.09					△ ×																				
REVISED					△ ×																				
2013.04.08					△ ×																				
					△ ×																				
DRAWN by	PLANNED by	CHECKED by	APPROVED by	△ ×																					
野中	諸岡			△ × 1	08.04.08	RoHS対応による改訂			松村																
				STAMP	DATE	REVISION			SIGN.																
MATERIAL					DESCRIPTION																				
JFE-CC-JN(ケムリ-) t1.2					Eシリーズ (RoHS対応品) △																				
					E18A外觀図																				
FINISH (COLOR)					MODEL No.		PART No.		SHEET																
塗装: 2.5Y5/1半ツヤメタリック中目後、シルク印刷					23 - 4915		25 - 1929 - 01		／																