


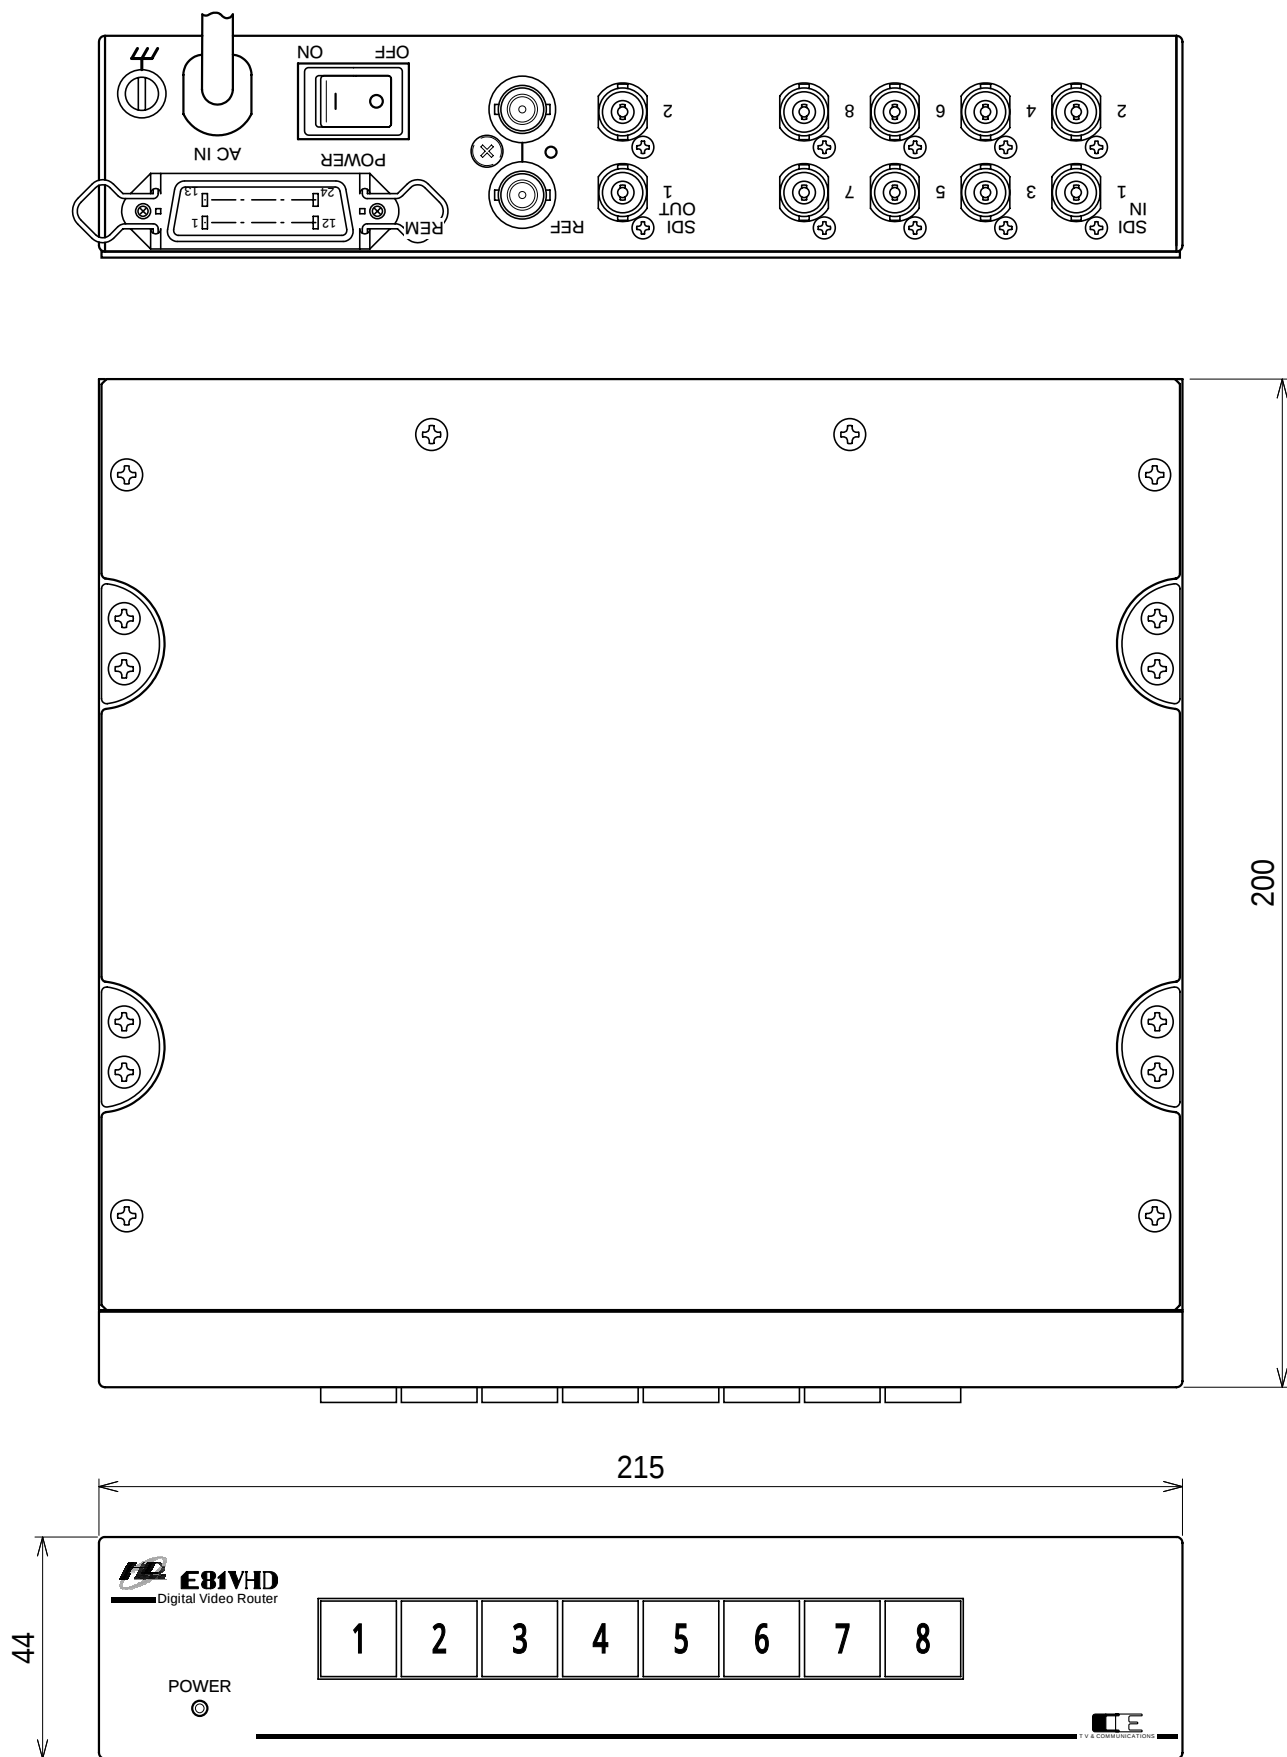

突起部は寸法に含みません

TOLERANCE			UNIT	mm	ANGLE	3rd	△ ×																	
<table><tr><td>L</td><td>4</td><td>± 0.1</td></tr><tr><td>4 < L</td><td>16</td><td>± 0.2</td></tr><tr><td>16 < L</td><td>63</td><td>± 0.3</td></tr><tr><td>63 < L</td><td>250</td><td>± 0.4</td></tr><tr><td>250 < L</td><td></td><td>± 0.6</td></tr></table>			L	4	± 0.1	4 < L	16	± 0.2	16 < L	63	± 0.3	63 < L	250	± 0.4	250 < L		± 0.6	ISSUED	2003.06.09	SCALE 	△ ×			
L	4	± 0.1																						
4 < L	16	± 0.2																						
16 < L	63	± 0.3																						
63 < L	250	± 0.4																						
250 < L		± 0.6																						
			REVISED	2013.04.05	△ ×																			
					△ ×																			
					△ ×																			
					△ ×																			
DRAWN by	PLANNED by	CHECKED by	APPROVED by	△ ×																				
野中	諸岡			△ × 1	08.03.18	RoHS対応による改訂			松村															
				STAMP	DATE	REVISION			SIGN.															
MATERIAL					DESCRIPTION																			
JFE-CC-JN(ケムリ-鋼板) t1.2					Eシリーズ (RoHS対応品)																			
FINISH (COLOR)					E 8 1 V H D 外観図																			
塗装:2.5Y5/1半ツヤメタリック中目後、シルク印刷					MODEL No.		PART No.		SHEET															
					23 - 4915		25 - 1955 - 01																	