


200

215

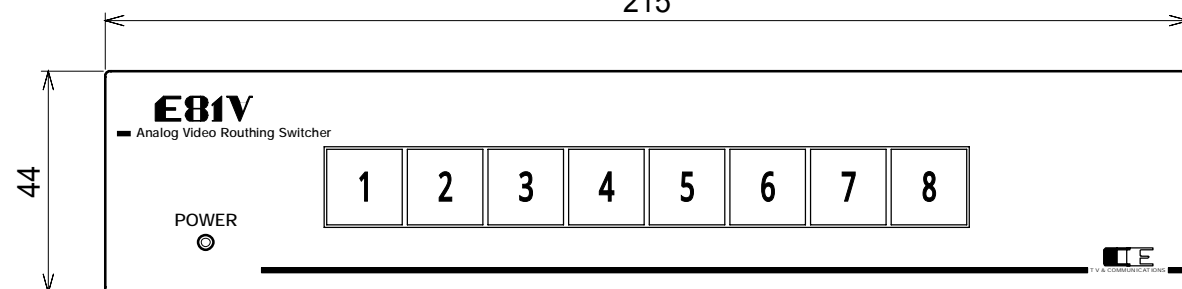

突起部は寸法に含みません

TOLERANCE <table border="1"> <tr><td>L</td><td>4</td><td>±0.1</td></tr> <tr><td>4 < L</td><td>16</td><td>±0.2</td></tr> <tr><td>16 < L</td><td>63</td><td>±0.3</td></tr> <tr><td>63 < L</td><td>250</td><td>±0.4</td></tr> <tr><td>250 < L</td><td></td><td>±0.6</td></tr> </table>	L	4	±0.1	4 < L	16	±0.2	16 < L	63	±0.3	63 < L	250	±0.4	250 < L		±0.6	UNIT	mm	ANGLE	3rd	△ x			
	L	4	±0.1																				
	4 < L	16	±0.2																				
	16 < L	63	±0.3																				
63 < L	250	±0.4																					
250 < L		±0.6																					
ISSUED	2004.02.20	SCALE	/		△ x																		
REVISED		△ x																					
DRAWN by	野中	PLANNED by	諸岡	CHECKED by	APPROVED by	△ x																	
						△ x 1	08.03.10	RoHS対応による改訂															
						STAMP	DATE	REVISION	SIGN.														
MATERIAL				DESCRIPTION																			
JFE-CC-JN(カムリ-鋼板) t1.2				E シリーズ (RoHS対応品)																			
FINISH (COLOR)				E 81V 外觀図																			
塗装: 2.5Y5/1半ツヤメリック中目後、シルク印刷				MODEL No.	23 - 4915	PART No.	25 - 1951 - 01	SHEET	/														